

## Diesel Powered Generating Sets C350 C



شرکت مهندسی کاراسهند  
Engineering KARA SAHAND



### Standard Genset Features

Cummins water cooled Diesel engine,  
Oil and fuel filter fitted, water separator,  
Lube-oil drain valve fitted  
Electric starter & Charge alternator 24 v D.C.  
Electronic governor  
Normal duty air filter  
Single bearing alternator, class H/H , IP23  
Standard voltage 400/230 volts 50 Hz  
Exciter/Voltage reg - Torque Match as std  
PCC2100 without Bargraph  
3 pole MCCB  
Welded steel base frame with A/V mounting,  
Anti Vibration Mounts  
Single skin metal fuel tank  
Tank capacity of min 8 hours operation at  
70% standby load  
Loose 9 dB(A) silencer  
Set mounted starting battery  
Engine Tractor Blue & Alternator Munsell Jade Green  
Radiator and Guarding black  
Packing under shrunk plastic film  
Operation & Maintenance manual  
Standard set of labels

### Generator Set Performance

**Voltage Regulation**  
Maintains voltage output to within  $\pm 1.0\%$ .  
At any power factor between 0.8 and 1.0  
At any variations from No load to Full load.  
At any variations from Cold to Hot.  
At speed droop variations up to 4.5%.  
**Frequency Regulation**  
Isochronous under varying loads from no  
load to 100% full load when electronic  
governor is fitted.  
**Random Frequency Variation**  
Will not exceed  $\pm 0.25\%$  of its mean value for  
constant loads – no load to full load.  
**Waveform**  
Total harmonic distortion open circuit voltage  
waveform in the order of 1.8%. Three-phase  
balanced load in the order of 5.0%.  
**Telephone Influence Factor (TIF)**  
TIF better than 50.  
THF to BS 4999 Part 40 better than 2%.  
**Alternator Temperature Rise**  
Class H insulation.  
**Radio Interference**  
In compliance with BS 800 and VDE levels  
G and N.

### Generator Set Options

**Mechanical Options**  
Compliance - CE Certification (Guarding)  
**Fuel options**  
Fuel Tank deletion  
**Exhaust Options**  
Exhaust Silencer - Industrial (9 dB), In-Line  
Exhaust Bellows  
Exhaust Silencer - Residential (25 dB), In-Line  
Installation Kit - Industrial Silencer  
**Warranty**  
Warranty - 5 Year Extended Standby Appln  
Warranty - 2 Year Extended Prime Appln

### Voltage Connections

277/480V, 3 Phase  
254/440V, 3 Phase  
240/416V, 3 Phase  
230/400V, 3 Phase  
220/380V, 3 Phase  
127/220V  
115/200V, 3 Phase  
110/190V, 3 Phase

### Miscellaneous Options

Coolant heater -240V  
Battery Charger 240V,5A  
PCC2100 with bargraph  
Packing - Export Box  
Packing - Export Box

### Compliance Standards

To BS4999/5000 pt 99,  
VDE 0530, UTE5100,  
NEMA MG1-22, CEMA,  
IEC 34, CSA A22.2,  
AS1359, BSS 5514,  
ISO 3046 and ISO 8528

### Engine Specification

Cummins NT855G6  
In-line direct injection  
6-cylinder diesel engine.  
Type  
Water cooled, four cycle  
Turbocharged  
Construction  
Two valves per cylinder, forged steel  
crankshaft and connecting rods, cast iron  
block.  
Starting  
24 volt negative earth. Battery charging  
alternator 35 amp on engine. Cranking  
current 640 amps at 0°C.  
Fuel System  
24 volt fail safe actuator. Spin-on paper  
element fuel filters with Bosch fuel  
pump injection system with integral  
Electronic governor. Dual flexible fuel lines  
and connectors. Standard fuel water  
separator.  
Filters  
Air cleaner with dry element and restriction  
indicator. Spin-on full flow lube oil filter.  
Cooling  
50°C radiator as std  
Stone guard. Oil cooler. Drain Tap

### Alternator Specification

Type  
Brushless single bearing, revolving field,  
pole, drip proof, screen protected.  
Class H Insulation.  
IC D1 cooling system.  
Fully interconnected damper winding.  
AC exciter and rotating rectifier unit.  
Epoxy coated stator winding.  
Rotor and exciter impregnated with tropical  
grade insulating oil and acid resisting  
polyester resin. Dynamically balanced rotor  
BS 5625 grade 2.5.  
Sealed for life bearings.  
Layer wound mechanically wedged rotor.  
Exciter  
Triple dipped in moisture, oil and acid  
resisting polyester varnish and coated with  
anti-tracking varnish.  
Output windings with 2/3 pitch for improved  
harmonics and paralleling ability.  
Close coupled engine/alternator for perfect  
alignment.

Model name	kVA		kWe	
	ESP	PRP	ESP	PRP
C350 D5	350	320	280	256

Specifications may change without notice

05/07/2006

C350 D5



نشانی: تهران، بلوار آفریقا (چردن)، نرسیده به الهیه، نیش خیابان طاهری

تلفن: ۰۲۱)۳۶۲۱۲۴۳۹-۴۱

برج مشکی، طبقه ۶، واحد ۵

فکس: ۰۲۱)۳۶۲۱۲۵۱۴

تلفن: ۰۲۱)۳۶۲۰۳۵۹۰۸-۹

www.karasahand.com

www.diesel-karasahand.ir



شرکت مهندسی کاراسهند  
Engineering KARA SAHAND



## TECHNICAL DATA

<b>Model</b>	C350 D5	<b>Speed</b>	1500 rpm
<b>Set output</b>	380-440 V 50 Hz	<b>Alternator voltage regulation</b>	±1.0%
<b>Prime Rating</b>	256 kW/ 320 kVA	<b>Alternator insulation class</b>	H
<b>Standby Rating</b>	280 kW/ 350 kVA	<b>Fuel consumption (Prime)</b>	69 l/hr
<b>Engine Make</b>	Cummins	<b>Fuel consumption (Standby)</b>	76 l/hr
<b>Engine Model</b>	NT855G6	<b>Lubrication system oil capacity</b>	38.6 Litres
<b>Cylinders</b>	Six	<b>Base fuel tank capacity – open set</b>	750 or 900 Litres
<b>Engine build</b>	In-line	<b>Coolant capacity</b>	63.9 Litres
<b>Standard Governor/Class</b>	Electronic/Class G2	<b>Exhaust temp – prime</b>	574°C
<b>Aspiration and cooling</b>	Turbocharged	<b>Exhaust gas flow – prime</b>	1071 l/s
<b>Bore and stroke</b>	140 mm x 152 mm	<b>Exhaust gas back pressure max</b>	76 mm Hg
<b>Compression Ratio</b>	14:1	<b>Air flow – radiator*</b>	4.92m <sup>3</sup> /s
<b>Cubic capacity</b>	14 Litres	<b>Air intake – engine (Prime)</b>	361 Litre/s
<b>Starting/Min °C</b>	Unaided / 4°C	<b>Minimum air opening to room</b>	2.10 sq m
<b>Battery capacity</b>	100 A/hr	<b>Minimum discharge opening</b>	1.39 sq m
<b>Gross Engine output – Prime</b>	280 kWm	<b>Pusher fan head (duct allowance)*</b>	13 mm Wg
<b>Gross Engine output – Standby</b>	310 kWm	<b>Heat radiated by eng (Prime)</b>	50 kWm

### PRIME POWER (PRP)

Prime power is available for an unlimited number of annual operating hours in variable load applications, in accordance with ISO8528-1.

A 10% overload capability is available for a period of 1 hour within a 12-hour period of operation, in accordance with ISO 3045-1.

### STANDBY POWER RATING (ESP)


The Standby Power Rating is applicable for supplying emergency power for the duration of a utility power interruption. No overload, utility parallel or negotiated outage operation capability is available at this rating.

In installations served by unreliable utility sources (where outages last longer or occur more frequently), where operation is likely to exceed 200 hours per year, the prime power rating should be applied.

The Standby Power rating is only applicable for emergency and standby applications where the generator set serves as the back up to the normal utility source.

All ratings are based on the following reference conditions:

- Ambient temperature – 27°C
- Altitude above sea level – 150 metres
- Relative humidity – 60%

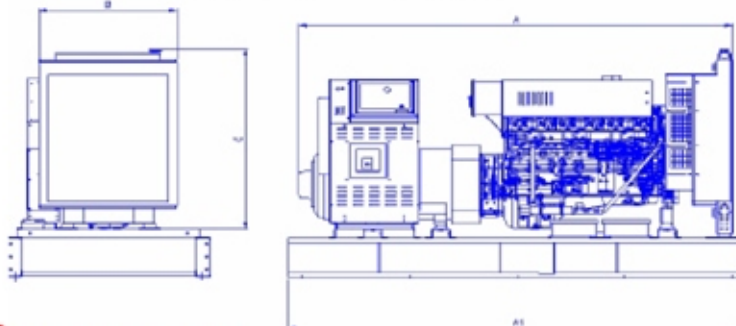

## Dimension

Model	Engine	Length (mm)	Width (mm)	Height (mm)	Set weight wet (Kg)	Set weight dry (Kg)	Enclosed Weight Wet (Kg)
C350 D5	NT855G6	3549	1100	2028	2078	3448	3258

Specifications may change without notice

### Cummins Power Generation Limited

Manston Park, Columbus Avenue  
Manston, Ramsgate  
Kent CT12 5BF, UK  
Telephone: +44 (0)1843 255000  
Fax: +44 (0)1843 255902  
Email: [cpg.uk@cummins.com](mailto:cpg.uk@cummins.com)  
[www.cumminspower.com](http://www.cumminspower.com)  
[www.cummins.com](http://www.cummins.com)

See your distributor for more information.



05/07/2006

C350 D5



نشانی: تهران، بلوار آفریقا (چردن)، نرسیده به الهیه، نبش خیابان طاهری

تلفن: ۰۲۱)۲۶۲۱۲۳۹-۴۱

برج مشکی، طبقه ۶، واحد ۵

فکس: ۰۲۱)۲۶۲۱۲۵۱۴

تلفن: ۰۲۱)۲۲۰۳۵۹۰۸-۹

[www.karasahand.com](http://www.karasahand.com)

[www.diesel-karasahand.ir](http://www.diesel-karasahand.ir)